


DEHNclip Bewehrungsklemme


Typ	Art.-Nr.
DC BK 6 RD10 STBLANK	308 130/
DC BK 8 RD10 STBLANK	308 131/
DC BK 10 RD10 STBLANK	308 132/
DC BK 12 RD10 STBLANK	308 133/

DC BK 6 RD 6 STBLANK	308 134/
DC BK 8 RD 8 STBLANK	308 135/
DC BK 12 RD12 STBLANK	308 136/
DC BK 8 RD12 STBLANK	308 137


*) Nenndurchmesser Ø der Bewehrung




Rd10 / Rd6* mm



Rd10 / Rd8* mm




Rd10 (Rd10*) / Rd10* mm




Rd10 / Rd12* mm




Rd6* / Rd6* mm



Rd8* / Rd8* mm




Rd12* / Rd12* mm



Rd8 / Rd12* mm

Typ	Art.-Nr.
DC BK 6 FL30 STBLANK	308 140/
DC BK 8 FL30 STBLANK	308 141/
DC BK 10 FL30 STBLANK	308 142/
DC BK 12 FL30 STBLANK	308 143


*) Nenndurchmesser Ø der Bewehrung




FL30 / Rd6* mm





FL30 / Rd8* mm



FL30 / Rd10* mm



FL30 / Rd12* mm

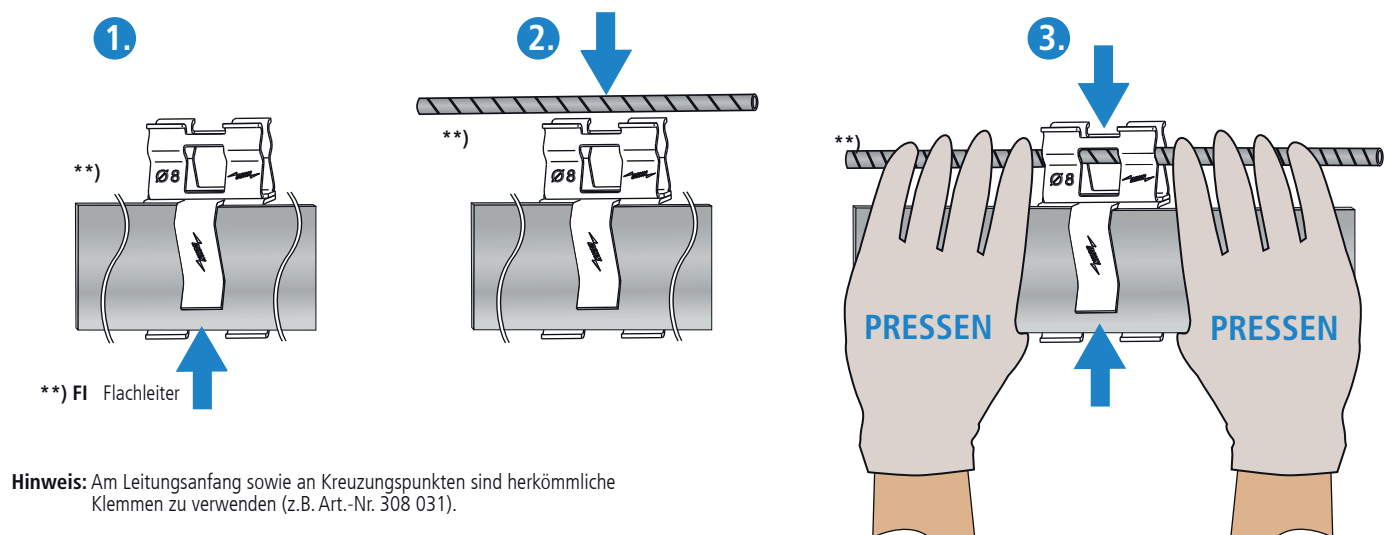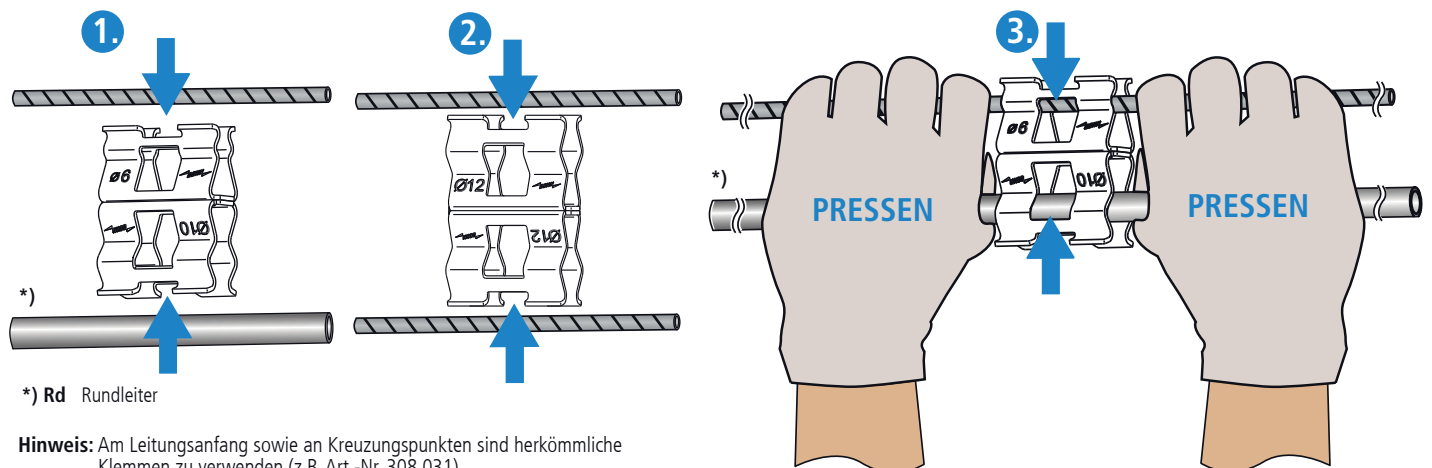


DEHNclip rebar clip


Type	Part No.
DC BK 6 RD10 STBLANK	308 130/
DC BK 8 RD10 STBLANK	308 131/
DC BK 10 RD10 STBLANK	308 132/
DC BK 12 RD10 STBLANK	308 133/

DC BK 6 RD 6 STBLANK	308 134/
DC BK 8 RD 8 STBLANK	308 135/
DC BK 12 RD12 STBLANK	308 136/
DC BK 8 RD12 STBLANK	308 137

*) Nominal diameter Ø of the rebar




Rd10 / Rd6* mm




Rd10 / Rd8* mm




Rd10 (Rd10*) / Rd10* mm




Rd10 / Rd12* mm




Rd6* / Rd6* mm



Rd8* / Rd8* mm



Rd12* / Rd12* mm




Rd8 / Rd12* mm

Type	Part No.
DC BK 6 FL30 STBLANK	308 140/
DC BK 8 FL30 STBLANK	308 141/
DC BK 10 FL30 STBLANK	308 142/
DC BK 12 FL30 STBLANK	308 143


*) Nominal diameter Ø of the rebar




FL30 / Rd6* mm



FL30 / Rd8* mm




FL30 / Rd10* mm




FL30 / Rd12* mm

1.




*) Rd round conductor

2.




3.

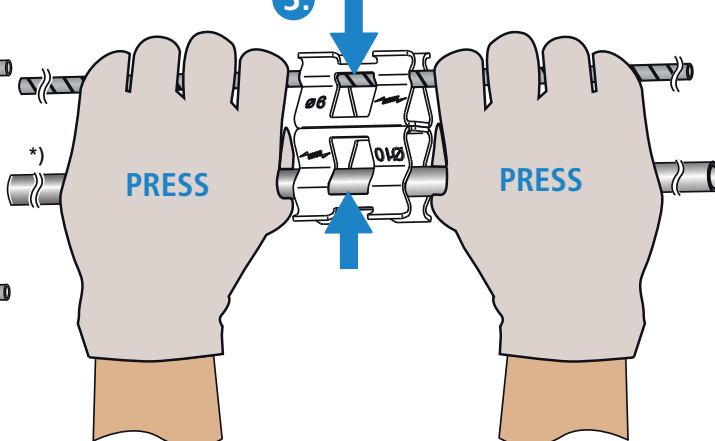


Note: Conventional clamps are to be used at the beginning of the conductor and at cross points (e.g. Part No. 308 031).

1.




**) Fl flat conductor

2.



3.

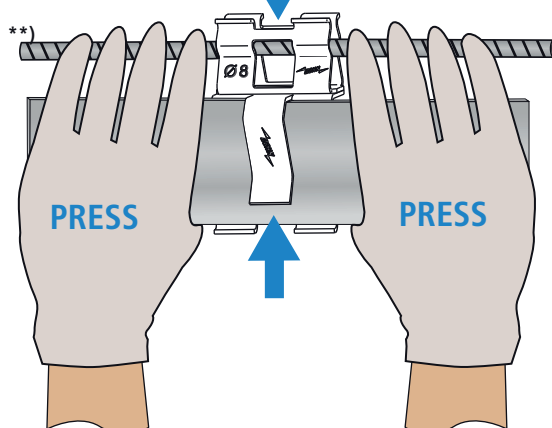

Note: Conventional clamps are to be used at the beginning of the conductor and at cross points (e.g. Part No. 308 031).

Surge Protection
Lightning Protection
Safety Equipment
DEHN protects.

DEHN + SÖHNE
GmbH + Co.KG.

Hans-Dehn-Str. 1
Postfach 1640
92306 Neumarkt
Germany

Tel. +49 9181 906-0
www.dehn-international.com