DC BK 6 RD6 STBLANK (308 134)

Figure without obligation

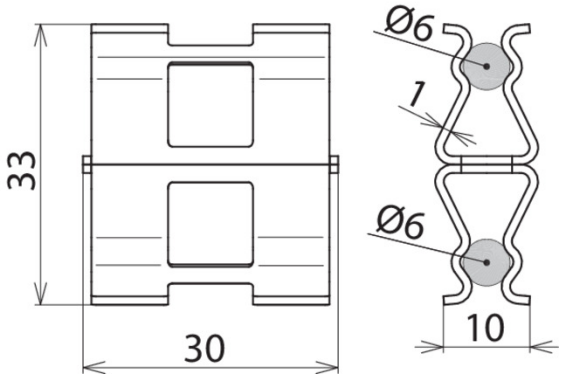

– Compact, light and resource-saving
– Quick and without tools
– Efficient and time-saving

Part No.	308 134 NEW
Material	St/bare
Clamping range Rd* / Rd	6-7 / 6-7 mm
Material thickness (t1)	1 mm
Short-circuit current (50 Hz) (1 s; ≤ 300 °C)	2.2 kA
Standard	EN 62561-1
Weight	18 g
Customs tariff number	85389099
GTIN	4013364308091
PU	50 pc(s)

*) Nominal diameter d_s of the reinforcement

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.